

DYNAMOOV


Single extension drawer Soft-close 25 kg




- Single extension drawer, 25 kg load capacity
- Soft-close damping system
- Plug-on installation
- Integrated height adjustment without tools +2 mm

ORDER INFORMATION


1 Dynamoov Soft-close single extension drawer, 25 kg		
NL	Item No.	Item No. l/r packed separately
260	F133100933 ²⁰⁷	F133100933 ²¹¹
285	F133100936 ²⁰⁷	F133100936 ²¹¹
310	F133100939 ²⁰⁷	F133100939 ²¹¹
335	F133100942 ²⁰⁷	F133100942 ²¹¹
360	F133100945 ²⁰⁷	F133100945 ²¹¹
385	F133100948 ²⁰⁷	F133100948 ²¹¹
410	F133100951 ²⁰⁷	F133100951 ²¹¹
435	F133100954 ²⁰⁷	F133100954 ²¹¹
460	F133100957 ²⁰⁷	F133100957 ²¹¹
485	F133100960 ²⁰⁷	F133100960 ²¹¹
510	F133100963 ²⁰⁷	F133100963 ²¹¹

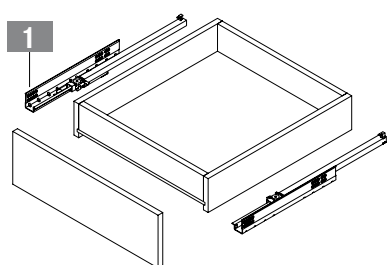

4-sided drawer

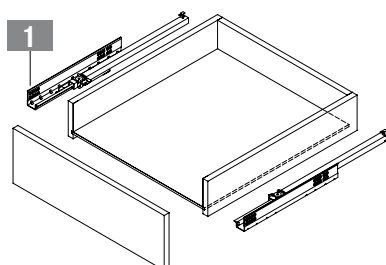

3-sided drawer

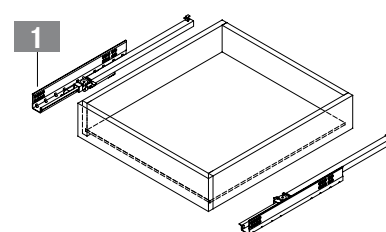

Inset drawer

PACKAGING UNITS

207 = VPE 10

211 = VPE 20

INSTALLATION INFORMATION

All dimensions in millimetres

Drawer installation dimensions	Drawer	NL	SKL	MET
$LWS = (LWK - 42)^{+0/-1,5}$ min. LWS = 65 mm min. 5 11-16 min. 37 9.5 21 LWK 11-13	$SKL = NL - 10 \pm 0.5$ min. 12 min. 5 37 $MET = NL + 5$	260	250	265
		285	275	290
		310	300	315
		335	325	340
		360	350	365
		385	375	390
		410	400	415
		435	425	440
		460	450	465
		485	475	490
Inset drawer		510	500	515
	$SKL = NL - 10 \pm 0.5$ min. 12 37 16 $MET = NL + 25$			

Back panel hole	Drawer holes	NL	A1	A2
Z $\varnothing 6 \times 10$ min. 21	A1 A2 $\varnothing 8 \times 2$ $\varnothing 6 \times 13$ min. 21 6	260	205	185
		285	220	200
		310	230	210
		335	245	225
		360	275	255
		385	285	265
		410	300	280
		435	310	290
		460	335	315
		485	350	330
		510	360	340

Fixing positions for single extension drawer	
KV 27 10 18 9 12 28 37 224 128 96 0 2 $MET = NL + 5$	KV 28 37 260 - 285 310 - 435 460 - 485 510

Euro screw $\varnothing 6.3 \times 14$ mm
Chipboard screw $\varnothing 4 \times 16$ mm
Screw head $\varnothing 7$ mm

LEGEND

HV Height adjustment
KV Front edge of cabinet
LWK Inside cabinet width
LWS Internal drawer width

MET Minimum installation depth
NL Nominal length
SKL Length of drawer


DYNAMOOV


Single extension drawer Self-close 25 kg




- Single extension drawer, 25 kg load capacity
- Self-close closing system
- Plug-on installation
- Integrated height adjustment without tools +2 mm

BESTELLINFORMATIONEN


1 Dynamoov Self-close single extension drawer, 25 kg			
NL	Item No.	Item No. l/r packed separately	
260	F133100900207	F133100900211	
285	F133100903207	F133100903211	
310	F133100906207	F133100906211	
335	F133100909207	F133100909211	
360	F133100912207	F133100912211	
385	F133100915207	F133100915211	
410	F133100918207	F133100918211	
435	F133100921207	F133100921211	
460	F133100924207	F133100924211	
485	F133100927207	F133100927211	
510	F133100930207	F133100930211	

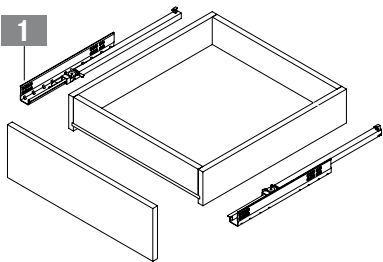

4-sided drawer

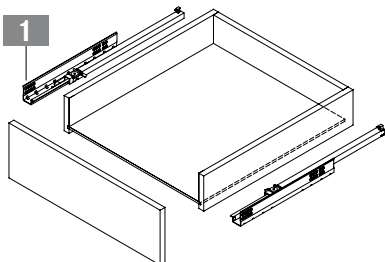

3-sided drawer

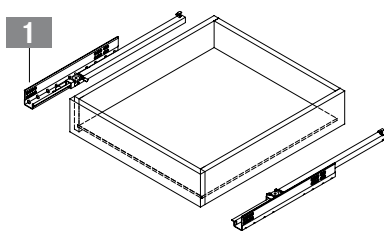

Inset drawer

PACKAGING UNITS

207 = VPE 10					
211 = VPE 20					

INSTALLATION INFORMATION

All dimensions in millimetres

Drawer installation dimensions	Drawer	NL	SKL	MET
$LWS = (LWK - 42)^{+0/-1,5}$ min. LWS = 65 mm min. 5 11-16 min. 37 9.5 21 LWK 11-13	$SKL = NL - 10 \pm 0.5$ min. 12 min. 5 37 $MET = NL + 5$	260	250	265
		285	275	290
		310	300	315
		335	325	340
		360	350	365
		385	375	390
		410	400	415
		435	425	440
		460	450	465
		485	475	490
Inset drawer		510	500	515
	$SKL = NL - 10 \pm 0.5$ min. 12 37 16 $MET = NL + 25$			

Back panel hole	Drawer holes	NL	A1	A2
Z $\varnothing 6 \times 10$ min. 21	A1 A2 $\varnothing 8 \times 2$ $\varnothing 6 \times 13$ min. 21 6	260	205	185
		285	220	200
		310	230	210
		335	245	225
		360	275	255
		385	285	265
		410	300	280
		435	310	290
		460	335	315
		485	350	330
		510	360	340

Fixing positions for single extension drawer		
KV 27 10 18 9 12 28 37 224 128 96 0 2 $MET = NL + 5$	KV 28 37 260 - 285 310 - 435 460 - 485 510	Euro screw $\varnothing 6.3 \times 14$ mm Chipboard screw $\varnothing 4 \times 16$ mm Screw head $\varnothing 7$ mm

LEGEND

HV Height adjustment
KV Front edge of cabinet
LWK Inside cabinet width
LWS Internal drawer width

MET Minimum installation depth
NL Nominal length
SKL Length of drawer

DYNAMOOV


Single extension drawer Tipmatic 25 kg




- Single extension drawer, 25 kg load capacity
- Plug-on installation
- Integrated height adjustment without tools +2 mm
- Integrated front gap adjustment +2,5 mm

BESTELLINFORMATIONEN


1 Dynamooov Tipmatic single extension drawer, 25 kg		
NL	Item No.	Item No. l/r packed separately
260	F133100966206	F133100966265
285	F133100969206	F133100969265
310	F133100972206	F133100972265
335	F133100975206	F133100975265
360	F133100978206	F133100978265
385	F133100981206	F133100981265
410	F133100984206	F133100984265
435	F133100987206	F133100987265
460	F133100990206	F133100990265
485	F133100993206	F133100993265
510	F133100996206	F133100996265

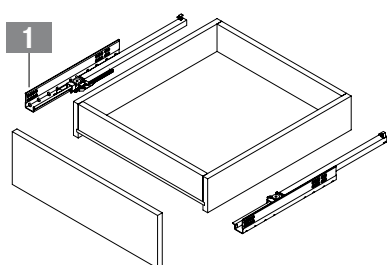

4-sided drawer

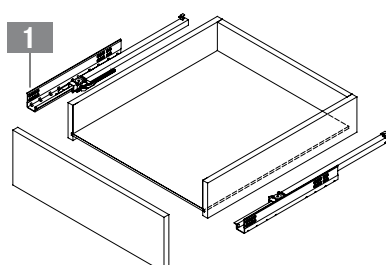

3-sided drawer

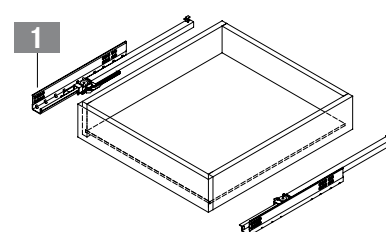

Inset drawer

PACKAGING UNITS




206 = VPE 8

265 = VPE 16

INSTALLATION INFORMATION

All dimensions in millimetres

Drawer installation dimensions	Drawer	NL	SKL	MET
$LWS = (LWK - 42)^{+0/-1,5}$ min. LWS = 65 mm min. 5 11-16 min. 37 9.5 21 LWK 11-13	$SKL = NL - 10 \pm 0.5$ min. 12 min. 5 37 $MET = NL + 5$	260	250	265
		285	275	290
		310	300	315
		335	325	340
		360	350	365
		385	375	390
		410	400	415
		435	425	440
		460	450	465
		485	475	490
Inset drawer		510	500	515
$SKL = NL - 10 \pm 0.5$ min. 12 min. 5 37 $MET = NL + 5$	$SKL = NL - 10 \pm 0.5$ min. 12 16 $MET = NL + 25$	260	250	265
		285	275	290
		310	300	315
		335	325	340
		360	350	365
		385	375	390
		410	400	415
		435	425	440
		460	450	465
		485	475	490

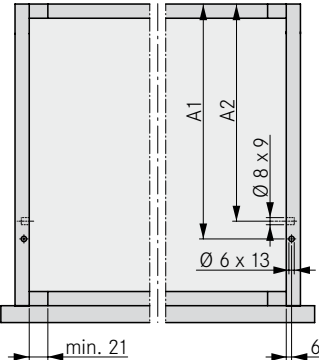Back panel hole	Drawer holes	NL	A1	A2
		260	205	185
		285	220	200
		310	230	210
		335	245	225
		360	275	255
		385	285	265
		410	300	280
		435	310	290
		460	335	315
		485	350	330
	510	360	340	

Fixing positions for single extension drawer		
KV 27 10 18 9 12 28 37 224 128 96 0 2 MET = NL + 5	KV 28 37 260 - 285 310 - 435 460 - 485 510	 Euro screw Ø 6.3 x 14 mm
		 Chipboard screw Ø 4 x 16 mm
		Screw head Ø 7 mm

LEGEND

HV Height adjustment
KV Front edge of cabinet
LWK Inside cabinet width
LWS Internal drawer width

MET Minimum installation depth
NL Nominal length
SKL Length of drawer